

Polarization Insensitive Mini Fiber Optic Circulator (FCIR Series)


The Mini Fiber Optic Circulator is a compact, high performance lightwave component that routes incoming signals from Port 1 to Port 2, and incoming Port 2 signals to Port 3. The component provides high isolation, low insertion loss, low PDL, low PMD and excellent environmental stability. It is widely used in combination with fiber gratings and other reflective components in DWDM systems, high speed systems and bi-direction communication systems.

Specifications

Parameter	Unit	Value
Center Wavelength (λ_c)	nm	1310 or 1550
Operating Wavelength Range	nm	$\lambda_c \pm 20$
Typ. Insertion Loss	dB	0.7
Max. Insertion Loss	dB	0.8
Min. Isolation, 23 °C	dB	45
Min. Crosstalk	dB	50
Min. Return loss	dB	55
Max. Polarization Dependent Loss, 23 °C	dB	0.1
Max. Polarization Mode Dispersion	ps	0.1
Max. Optical Power (Continuous Wave)	mW	300
Max. Tensile Load	N	5
Fiber Type		SMF-28 fiber
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85
Package Dimensions	mm	5.5 × 50

*IL is 0.3 dB higher and RL is 5 dB lower for each connector added.

Package Dimensions

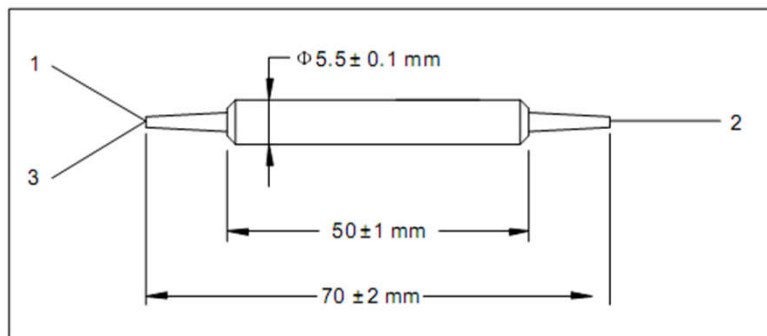

Ordering Information

FCIR-①①-②-③-④-⑤

①①: Wavelength	②: Connector Type	③: Fiber Jacket	④: Fiber Length
31 - 1310 nm	1 - FC/UPC	B - 250 μ m bare fiber	1 - 1.0 m
55 - 1550 nm	2 - FC/APC	L - 900 μ m loose tube	S - Specify
SS - Specify	3 - SC/UPC	S - Specify	
	4 - SC/APC		⑤: Package Length
	N - None		1 - 50 mm
	S - Specify		S - Specify