



Variable Optical Delay Line (VDL Series)

Variable Optical Delay Line provides precision optical path variation of more than 15 cm (500 ps). The compact, rugged design makes the device ideal for integration in network equipment, test instruments, and optical for integration in network equipment, test instruments, and optical coherence tomography (OCT) systems for precision optical path length or timing alignment.


Specifications

Parameter	Unit	Values
Center Wavelength (λ_c)	nm	1060 or 1550
Operation Wavelength	nm	$\lambda_c \pm 50$
Optical Delay Range	ps	0 - 500 ps continuous
Zero Point Delay Offset**	ps	~440
Readout Scale Resolution	mm	1.0
Max. Insertion Loss	dB	1.2
Max. Insertion Loss Variation	dB	0.5
Max. PDL (for Singlemode model)	dB	0.1
Min. Extinction Ratio (for PM model)	dB	20
Min. Return Loss	dB	50
Max. Optical Power Handling (Continuous Wave)	mw	300
Operating Temperature	°C	0 to +40
Storage Temperature	°C	-40 to +60
Fiber Type		Singlemode or PM Panda fiber

*IL is 0.5 dB higher, RL is 5 dB lower and ER is 2 dB lower for each connector added, measured at center wavelength

**Absolute delay at 0 ps setting measured to the edge of the enclosure (excluding caps, boots, and pigtails).

Package Dimensions

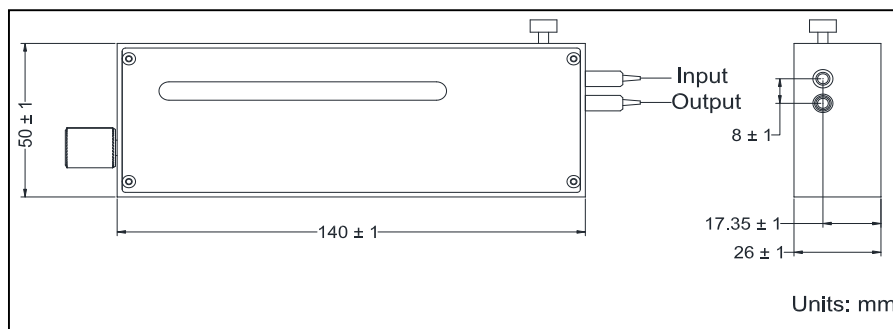

Ordering Information

VDL-①①①①②②②③④⑤⑥⑦

①①①①: Wavelength
1060 - 1060 nm
1550 - 1550 nm
SSSS - Specify

②②②: Delay Range
500 - 500 ps
SSS - Specify

③: Attenuator
A - Attenuator
N - None

④: Connector Type
1 - FC/UPC 4 - SC/APC
2 - FC/APC N - None
3 - SC/UPC S - Specify

⑤: Fiber Jacket
B - 250 μ m bare fiber
L - 900 μ m loose tube
3 - 3 mm cable
S - Specify

⑥: Fiber Length
1 - 1.0 m
S - Specify

⑦: Fiber Type
S - Singlemode fiber
P - PM fiber